
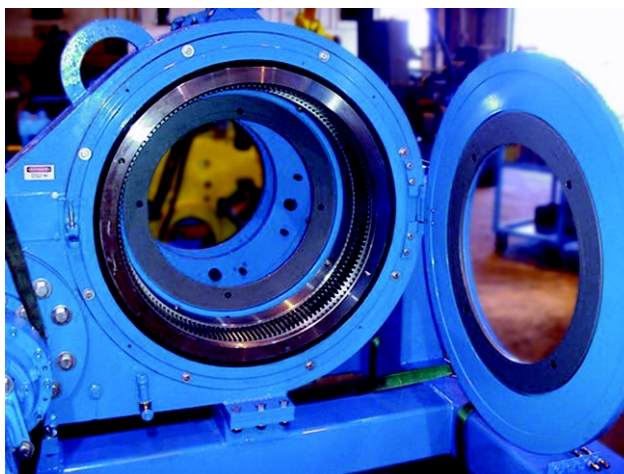


# Model 814 Bucking Unit

National Oilwell Varco's Model 814 "Peck-O-Matic" Bucking Unit offers absolute precision to achieve proper make-up in off-the-rig-floor operations.

Features and benefits of the Model 814 include:

- Capacity range of 8½" to 21" O.D.
- Torque output up to 100,000 lb-ft (low gear, High Torque model)
- Efficient, closed head design
- Contamination-free oil bath lubrication
- Precise torque control
- Optional computer control and data monitoring
- Soft-shoe, non-marking, gripping system available for most units
- Optional electric or diesel power units
- Load cell/computer control available

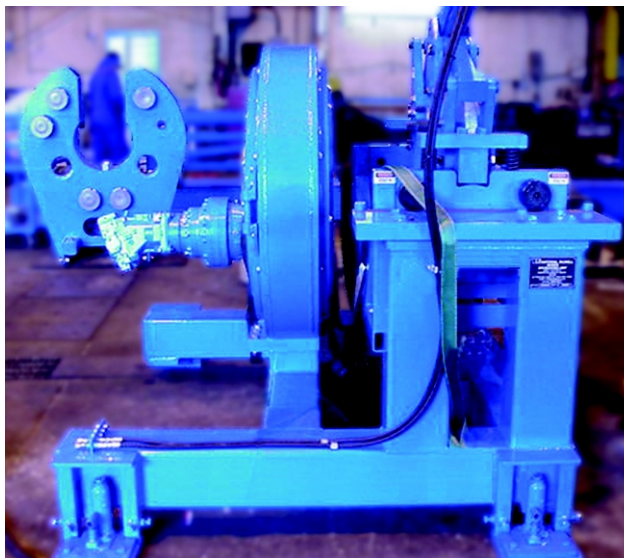

**Model 814 Bucking Unit**

## Specifications

Model	Description	Capacities	Torque Output	
			High Gear	Low Gear
814 — Standard	Bucking Unit	8½" to 21"	25,000 lb-ft @ 3860 psi 20 rpm @ 50 gpm	50,000 lb-ft @ 3860 psi 11 rpm @ 50 gpm
814 — High Torque	Bucking Unit	8½" to 21"	50,000 lb-ft @ 5470 psi 15 rpm @ 50 gpm	100,000 lb-ft @ 5470 psi 8 rpm @ 50 gpm

[www.nov.com](http://www.nov.com) / [downhole.tools@nov.com](mailto:downhole.tools@nov.com)

Corporate Headquarters  
10000 Richmond Avenue  
Houston, Texas 77042  
United States  
Phone: 713 346 7500  
Fax: 713 346 4493

Sales and Service  
9120 - 34A Avenue  
Edmonton, AB T6E 5P4  
Canada  
Phone: 780 702 5209  
Fax: 780 463 2348

 **NATIONAL OILWELL VARCO**